


## RaceSafeH2O Antenna Placement Notice

---

This document outlines the correct placement of the RaceSafe H2O antenna. Failure to follow these guidelines can cause problems with the system and may place you and other competitors at risk. You may be requested to refit or replace your antenna before competing if it does not comply.

Antennas must be placed on the exterior surface of the boat in a level position clear of obstructions. Please see diagram below:

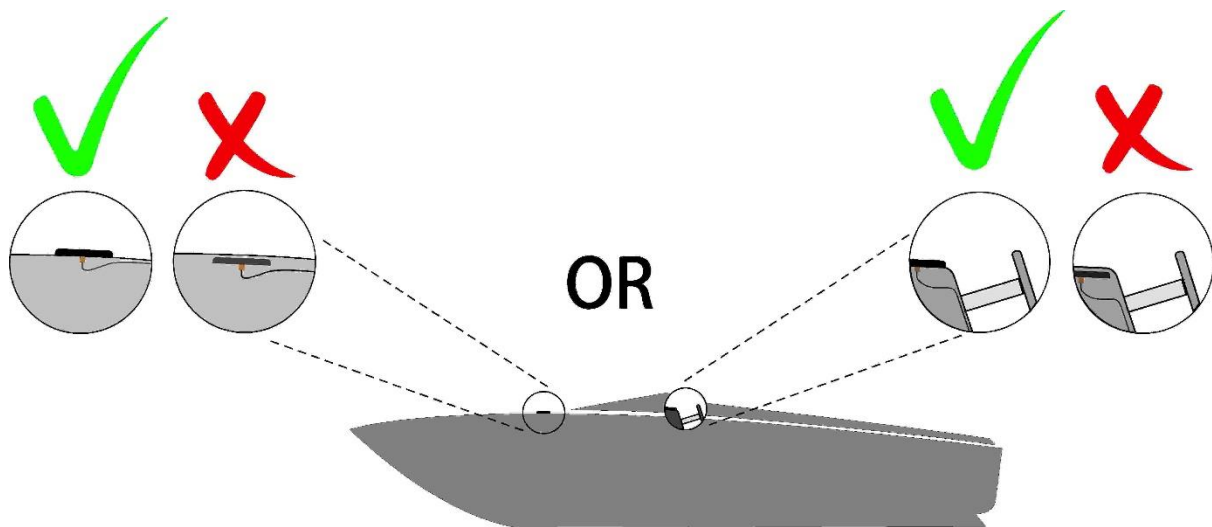

While we understand it may be difficult to find a totally level surface, placing an antenna any more than 15° from level will reduce its effectiveness and will result in non-compliance.

Wrapping or painting antennas can also cause a drop in signal. While in some cases this may have no effect, for safety purposes you may be asked to repair or replace any wrapped or painted antennas. Please check with RaceSafe staff before wrapping or painting antennas.

Any further questions please contact RaceSafe here: [contact@statusas.com](mailto:contact@statusas.com)